




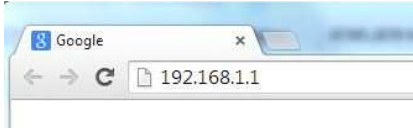

Setup the router

- Connect WUS 3G router with network cable to network port of PC or laptop and follow instructions below.

<p>Open a browser . Type 192.168.1.1 in the address bar and press Enter.</p> 	<p>Login screen with verification window appears.</p> <ul style="list-style-type: none"> • Username: admin • Password: admin
<p>Asus main screen appears</p> 	<p>Select 3G sharing</p> 
<p>Select authentication method of choice (WIFI security)</p>  <p>Click "More details..."</p>	<p>Select your 3G Location and ISP*</p>  <ul style="list-style-type: none"> • Hit [Apply]. Wait for finalizing configuration. • Goto Hardware setup below. • Location not provided? proceed section below.

*** If your Location/ISP is not provided**


1. Select "manual" in the Location dropdown box.
2. Find your ISP/APN combination in the list provided at www.weerhuisje.nl > Products > Specials > Weather upload servers > WUS 3G router
3. Provide APN and, if provided in the document, Account/Password in respective 3G Country and ISP fields.

Hardware setup


- Disconnect power from WUS-3G router. Disconnect network cable from PC/Laptop.
- Remove SIM card socket at the side of the 3G modem, place **simlock free** SIM card **without PIN code!!** and reseal socket.
- Connect 3G modem USB cable to WUS02 3G router.
- Apply power to WUS 3G router only. Within 15 minutes leds on WUS 3G router should be on (except lan-led). Led on 3G modem on steady. No connection within 15 minutes? Check 3G reception (use a mobile phone); change physical location; repeat Hardware setup.
- Connect network cable to Router and WUS02. Insert little black USB-stick into USB-hub. Apply power to WUS02. Within 20 minutes all leds (except third led) on WUS02 should be on/blinking. Upload starts automatically.

Setup WUS02 boot mode

1. Login on WUS02 (consult weerhuisje.nl > Help > FAQ > WUS02)
2. Select System tab:

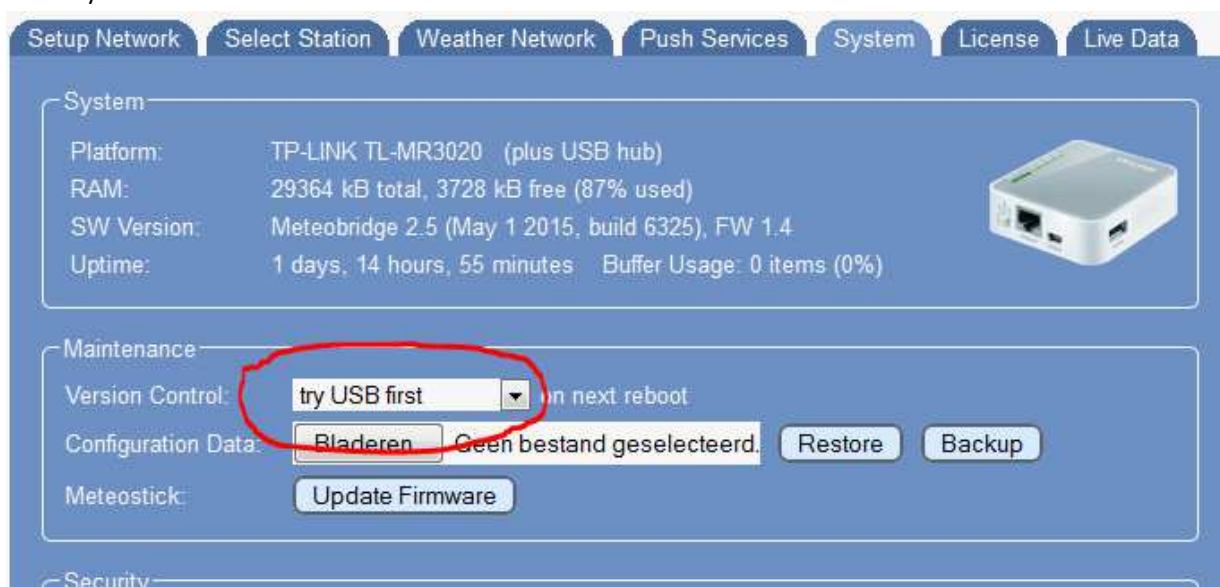

3. Version control: Select "try USB first"

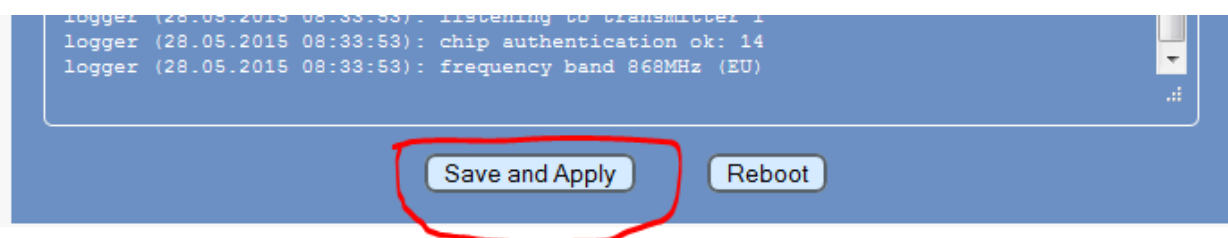

4. Click [Save and Apply] at bottom of page.
5. Done.